

Stacker-Reclaimer



Stacker-Reclaimer

Theoretical reclaiming capacity	500-2000 m ³ /h
Number of buckets	8-10 pcs
Guaranteed reclaiming capacity	400-1500 t/h
Stacking capacity	800-1600 t/h
Travelling speed	3-15 m/min
Max. stacking radius	35 m
Max. Reclaiming radius	32 m
Bulk density of handled coal	0.85 - 0.9 t/m ³

Salient Features


- n Comprises of heavy main & auxiliary structures
- n Wide range of capacities available
- n Various types like, Stacker-Reclaimer, Twin Boom Stacker, Barrel Reclaimer, Slewing Stacker etc. are available



Rail Mounted Slewing Stacker/ Bucket Wheel Reclaimer

Max. Theoretical capacity	3000 t/h
Max. Reclaiming radius	35 m
Height of reclaiming	20 m
Rail gauge	5-15 m
Belt width of yard conveyor	1200-1400 mm

- n High strength structural steel gives better reliability and lesser weight
- n AC inverter control ensures jerk less operation for electrical drives
- n Capacity, Rail Gauge, Radius, Speeds, Control system & other parameters can be made available as per customer requirement

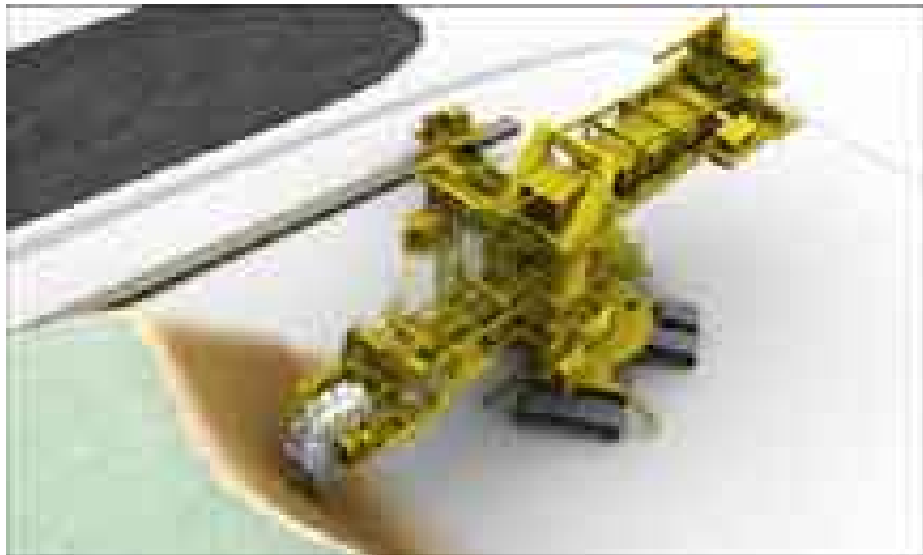

Regional Offices

KOLKATA
1, Taratolla Road
Garden Reach, Kolkata-700 024
Ph : (033) 2469-3732-36
Fax : (033) 2469-2143 / 3731
E-mail : mhg-er@tilindia.com

MUMBAI
307, Centre Point, M. V. Road
J. B. Nagar, Andheri (East)
Mumbai - 400 059
Ph : (022) 6643 0192-95
Fax : (022) 6643 0904
E-mail : mumbai.til@tilindia.com

DELHI
Plot No. 11, Site No. 4, Industrial Area
Ghaziabad, Sahibabad 201 010, U.P.
Ph : (0120) 277 7945
Fax : (0120) 2770 365
E-mail : shb-mhgmktg@tilindia.com

CHENNAI
Jhaver Plaza, 7th floor
1-A, Nungambakkam High Road,
Chennai 600 034
Ph : (044) 2827 0723 / 6103
Fax : (044) 2827 9681
E-mail : tilchn@vsnl.net